Eavesdropping on practical quantum cryptography

Mark Williamson and Vlatko Vedral
Optics Section, Blackett Laboratory, Imperial College, London SW7 2BW, UK
(Dated: February 1, 2008)

Practical implementations of quantum cryptography use attenuated laser pulses as the signal source rather than single photons. The channels used to transmit are also lossy. Here we give a simple derivation of two beam-splitting attacks on quantum cryptographic systems using laser pulses, either coherent or mixed states with any mean photon number. We also give a simple derivation of a photon-number splitting attack, the most advanced, both in terms of performance and technology required. We find bounds on the maximum disturbance for a given mean photon number and observed channel transmission efficiency for which a secret key can be distilled. We start by reviewing two incoherent attacks that can be used on single photon quantum cryptographic systems. These results are then adapted to systems that use laser pulses and lossy channels.

arXiv:quant-ph/0211155v1 24 Nov 2002

I. INTRODUCTION

Quantum cryptography is, in theory, unbreakable [1, 2]. The laws of quantum mechanics allow a sender of a message and a receiver, known as Alice and Bob respectively, to defeat an eavesdropper, Eve, from accessing their communications. In the first quantum cryptography protocol discovered in 1984 by Bennett and Brassard (BB84) [3] the idea is that Alice encodes the logical bit values 0 and 1 on to four possible polarisation states of a photon, two in one basis such as horizontal and vertical polarisation ($|x\rangle$ and $|y\rangle$ respectively) and two in the conjugate basis, an equal superposition of the first basis. These photons could be encoded as having 45° and -45° polarisation ($|u\rangle$ and $|v\rangle$ respectively). Alice randomly sends one of them to Bob who will then measure each of the photons in one of the two bases also randomly and independently from Alice. After Bob has made his measurement, Alice reveals on a public channel the basis in which she sent her photon. Bob then tells her whether or not he measured in the same basis. If he did not or he did not detect a photon, the bit is discarded but if the same basis was used they keep the bit and both parties should now hold the same result of the bit's value. The procedure is repeated until Alice and Bob hold a long string of bits. This is their sifted key and they should have perfectly correlated bit strings. If, however, a malicious eavesdropper, Eve, was listening in an effort to obtain some of the key's information, she must make measurements on the states Alice sends to Bob. In doing this she will sometimes choose the wrong measurement and create errors in Alice and Bob's sifted key providing a signature of her presence to Alice and Bob when they come to a process called error correction and estimation. Alice and Bob sacrifice a subset of their key in order to do this and from their estimate of the error rate they may also calculate the maximum amount of information an eavesdropper could have obtained, a limit bounded by the laws of physics but as yet still unknown.

Bounds for specific attacks have been found; these are usually attacks in which the eavesdropper measures each individual state Alice sends to Bob known as incoherent attacks. Incoherent attacks on the BB84 protocol usually have the added restriction that they take into account information gained by the eavesdropper after public announcement of the basis but before error correction and privacy amplification. The optimal bound of an unrestricted attack using collective measurements of any size is still unknown. These may not be severe limits to the security of quantum cryptography at present because the technology needed to perform the simplest of controlled interactions on more than a few qubits is still at an early stage.

In reality however, there are added complications. All errors do not generally come from an eavesdropper alone. There will be noise in Bob's detectors and in the quantum channel they use to setup the key as well as equipment misalignments. Real implementations of quantum cryptography also have losses during transmission and they do not at present use single photon sources. Instead, attenuated laser pulses that may contain 0, 1, 2 or more photons are used as Alice's signal source. Practical implementation of quantum cryptography opens a security loophole and Eve may adapt her attacks to take advantage of these facts. We give a simple derivation of incoherent eavesdropping attacks on these imperfect systems. We give a general argument that applies equally well to systems with high mean photon number pulses as we make no approximation. These results apply equally well to coherent states as to mixed photon number states with Poissonian distribution. Three attacks are analyzed in increasing order of technological sophistication of the eavesdropper. This is another important point: the practical quantum cryptography system need only prevent the most technologically powerful eavesdropper at the time key distribution takes place. This is unlike classical cryptography where a message may be stored until an eavesdropper has the technology with which to break it [1].

Provided Alice and Bob can calculate the maximum level of information Eve could have obtained on their key from error estimation and by making a decision on how advanced her attack could have been in the worst case, Alice and Bob may be still able to distill a secret key on which Eve has negligible information using a classical process called privacy amplification [4]. Finding these

limits is important for the security of quantum cryptography which *could* take into account the technology of the eavesdropper and *should* include the settings and limits of Alice and Bob's equipment as well as fundamental physics. We give bounds on the maximum error rate Alice and Bob can tolerate for a realistic system with channel losses and laser pulses as the signal source for three incoherent attacks increasing in the technological power of the eavesdropper.

The paper is organized as follows. We start by reviewing eavesdropping attacks where Alice uses a single photon source to send key bits to Bob in section II. We review two strategies: The simplest strategy that Eve can employ, that of intercept-resend, a strategy whose implementation is well within the reach of current technology to that of the optimum incoherent attack for which the technology is not yet available. This latter attack involves storing quantum states for long times and well controlled interactions between a probe (one or more qubits) and the state the eavesdropper is trying to identify. These strategies provide the foundations for section III, eavesdropping on systems that use laser pulses and have a quantum channel with a transmission efficiency that may be less than unity. Beam-splitter attacks are analyzed in detail using intercept-resend or optimal incoherent attacks. Lastly, the photon-number splitting attack is analyzed, the most advanced strategy an eavesdropper could use and relies on performing unlimited efficient quantum non-demolition measurements: technology that is unlikely to be available for a long time. In sections II C and III G we present some analysis on what Alice and Bob can do to counter Eve's attacks.

II. INCOHERENT EAVESDROPPING: SINGLE PHOTON SOURCES

Presented here are two attacks that an eavesdropper, Eve, can employ depending on the sophistication of her technology on a perfect quantum cryptographic system using the BB84 protocol. The simplest, an intercept-resend strategy, could be implemented with equipment currently available whereas an attack using the optimal incoherent strategy would require an advance in technology. The latter attack belongs to class sometimes referred to as 'translucent attacks with entanglement' [5].

A. The intercept-resend strategy

The idea with this kind of attack is to measure all or a proportion, ϵ, of the states Alice sends to Bob. If she chooses to measure only a fraction, ϵ, of the states, how she chooses which states to measure is dependent on how much information she wishes to obtain on the final message while making her presence as inconspicuous as possible. We will not consider how she chooses this fraction.

Presented here is an argument adapted from [7, 8]. Eve makes her measurement on a state and given her result she makes the best guess as to what the *logical bit value* of the state was that Alice intended Bob to receive. Eve then prepares one of the two states in the intermediate or Breidbart basis depending on this guess and sends it on to Bob. As we shall see, the two intermediate states belong to the same basis in which Eve makes her measurement.

The four states Alice can send to Bob in the BB84 protocol are

$$|x\rangle = \frac{1}{\sqrt{2}}(|u\rangle + |v\rangle)$$

$$|y\rangle = \frac{1}{\sqrt{2}}(|u\rangle - |v\rangle)$$

$$|u\rangle = \frac{1}{\sqrt{2}}(|x\rangle + |y\rangle)$$

$$|v\rangle = \frac{1}{\sqrt{2}}(|x\rangle - |y\rangle) \tag{1}$$

Eve does not have to guess the state with the best probability of being correct. Alice and Bob are trying to set up a key composed of 1s and 0s. It does not matter what state it is if Eve is only trying to find out the values of the bits. Alice must encode her states as in figure 1. Note that the logical bit values for the two states in the same basis must be different otherwise public announcement of the basis would result in Eve knowing everything about the key by simply passively monitoring this public conversation. Eve's best chance of guessing the value of the bit with a simple, presently implementable measurement is to have two outcomes M_0 and M_1. The probability of guessing the bit value correctly is

$$P_c = \frac{1}{4}[\langle x|M_0|x\rangle + \langle v|M_0|v\rangle + \langle y|M_1|y\rangle + \langle u|M_1|u\rangle] \tag{2}$$

Where the two measurement operators have to satisfy $M_0 + M_1 = I$. I the identity matrix. The measurement operators are

$$M_0 = |0\rangle\langle 0|$$

$$M_1 = |1\rangle\langle 1| \tag{3}$$

The two states $|0\rangle$ and $|1\rangle$ are given by

$$|0\rangle = \cos\theta|x\rangle - \sin\theta|y\rangle \tag{4}$$

$$|1\rangle = \sin\theta|x\rangle + \cos\theta|y\rangle \tag{5}$$

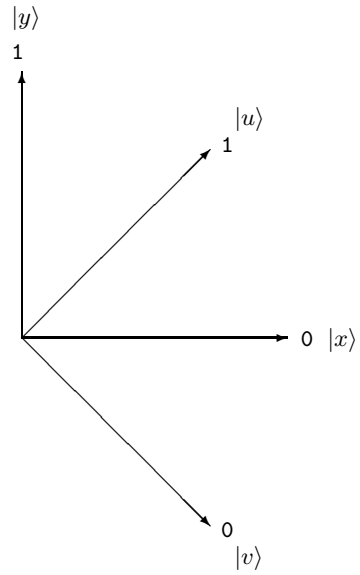

FIG. 1: The four states of the BB84 protocol represented by their logical bit values.

Where θ is a variable angle taken clockwise from $|y\rangle$. Substituting the forms of M_0 and M_1 into equation (2) we get

$$P_c = \frac{1}{2} + \frac{1}{4}[\cos 2\theta + \sin 2\theta] \tag{6}$$

To find the measurement basis that gives the best chance of guessing the bit value correctly we maximize P_c with respect to θ i.e.

$$\frac{dP_c}{d\theta} = -\frac{1}{2}[\sin 2\theta - \cos 2\theta] = 0 \tag{7}$$

This gives $\tan 2\theta = 1$ or $\theta = \pi/8 = 22.5^o$. $|1\rangle$ is orthogonal to $|0\rangle$ and 22.5^o clockwise from $|y\rangle$. This is known as the intermediate or Breidbart basis. Substituting the value of θ into equation (6) gives $P_c = 1/2(1 + 1/\sqrt{2})$. The intermediate states, are now given by

$$|0\rangle = \cos(\pi/8)|x\rangle - \sin(\pi/8)|y\rangle \tag{8}$$

$$|1\rangle = \sin(\pi/8)|x\rangle + \cos(\pi/8)|y\rangle \tag{9}$$

We have now found the best basis in which to guess the value of the bits Alice has encoded on to the quanta. Alice and Bob check for Eve's presence by measuring the proportion of errors in their sifted key after the public announcement of the basis. It turns out that Eve minimizes the disturbance to the sifted key by recording the value of her measurement, either M_0 or M_1, then sending on to Bob one of two states in the measurement basis either $|0\rangle$ or $|1\rangle$ i.e. if Alice sends $|x\rangle$ Eve will make her measurement and get the result M_0 a proportion P_c of the time and send Bob $|0\rangle$. Eve may also get the result M_1 a proportion $1 - P_c$ of the time and guess the value of the state incorrectly. In this case she sends $|1\rangle$. Eve causes an error in Alice and Bob's key when Bob gets the result that $|y\rangle$ was sent. This probability, D, that Eve causes a disturbance or error is

$$D = P_c\langle 0|M_y|0\rangle + (1 - P_c)\langle 1|M_y|1\rangle \tag{10}$$

Where $M_y = |y\rangle\langle y|$ is the outcome of Bob's measurement. It is sufficient to analyze only this case only without the prior probability weightings of $|x\rangle$, $|y\rangle$ etc. being sent if they are all equal. Equation (10) reduces to

$$D = 2P_c(1 - P_c)$$

$$D = \frac{1}{4} \tag{11}$$

If Alice and Bob see that a quarter of the bits in their sifted key are incorrect while error checking, this is a give away that Eve was on the line. To mask her presence more carefully Eve can measure a proportion of the states ϵ. In this case Eve's probability of guessing the state correctly is

$$P_c(\epsilon) = \frac{\epsilon}{2}(1 + \frac{1}{\sqrt{2}}) + \frac{1-\epsilon}{2}$$

Where the last term on the right comes from the fact that Eve can guess with an 50/50 chance the identity of the bit values she did not measure. The disturbance becomes

$$D(\epsilon) = \frac{\epsilon}{4}$$

Combining these two expressions we get the probability of Eve guessing the bit value correctly as a function of D.

$$P_c(D) = \sqrt{2}D + \frac{1}{2} \tag{12}$$

Note that $D_{max} = 1/4$ as this is when $\epsilon = 1$.

B. The optimal incoherent strategy

This strategy is reported from Fuchs *et al.* [9] who proved it to be the optimum incoherent strategy an eavesdropper can use on an ideal quantum cryptography system using the BB84 protocol. The derivation given here was first given by Cirac and Gisin [10] who found a simple symmetry argument that gives the same result. This attack is not available to an eavesdropper with present technology.

The idea is to evolve a probe in some initial standard state, $|a\rangle$, into distinct probe states dependant on the state of Alice's photon with which the probe is interacted with. The probes can then be stored until Alice

and Bob announce the basis so that Eve can increase her chance of distinguishing the probe (and Alice's state) by choosing the best measurement for that particular basis. Simultaneously Eve wants to make the state she is sending to Bob as much alike to the state Alice sent to minimize the disturbance or error rate to the sifted key. We have the following interactions for the x-y basis.

$$|a\rangle \otimes |x\rangle \longrightarrow |a_{00}^{xy}\rangle \otimes |x\rangle + |a_{01}^{xy}\rangle \otimes |y\rangle \tag{13}$$

$$|a\rangle \otimes |y\rangle \longrightarrow |a_{10}^{xy}\rangle \otimes |x\rangle + |a_{11}^{xy}\rangle \otimes |y\rangle \tag{14}$$

with similar interactions for the u-v basis. The second kets in each tensor product on the right hand side after tracing out the probe states form the mixed state Bob will receive. The first kets in each tensor product after tracing out Bob's system will form the mixed state Eve will keep. Notice that the probe states $|a_{ij}^{xy,uv}\rangle$ are not normalized yet. These two interactions can be written more neatly in matrix form.

$$|a\rangle \otimes \begin{pmatrix} |x\rangle \\ |y\rangle \end{pmatrix} \longrightarrow \varepsilon^{xy} \otimes \begin{pmatrix} |x\rangle \\ |y\rangle \end{pmatrix} \tag{15}$$

Where ε^{xy} is the matrix containing the (un-normalized) probe states. A similar expression can be constructed for the u-v basis simply by changing subscripts. The probe state matrices in either basis have the form

$$\varepsilon = \begin{pmatrix} |a_{00}\rangle & |a_{01}\rangle \\ |a_{10}\rangle & |a_{11}\rangle \end{pmatrix} \tag{16}$$

Using the Hadamard transform, H, we can transform this matrix of probe states from one basis to the other. The transform is

$$\varepsilon^{uv} = H\varepsilon^{xy}H^{\dagger} \tag{17}$$

where H is

$$H = H^{\dagger} = \frac{1}{\sqrt{2}}\begin{pmatrix} 1 & 1 \\ 1 & -1 \end{pmatrix} \tag{18}$$

Here we introduce the symmetry part of the argument. We are going to impose the conditions that
(i) All overlaps between probe states should be invariant under the change of labels $0 \longleftrightarrow 1$. This means $\langle a_{10}|a_{11}\rangle = \langle a_{01}|a_{00}\rangle$ etc.
(ii) Overlaps between states in one basis should be the same as overlaps in the other basis. For example $\langle a_{00}^{xy}|a_{00}^{xy}\rangle = \langle a_{00}^{uv}|a_{00}^{uv}\rangle$.
Going back to equation (13) we need to normalize the probe states and enforce the unitary evolution condition (that overlaps should be preserved). Normalization requires

$$\langle a_{00}|a_{00}\rangle + \langle a_{01}|a_{01}\rangle = 1 \tag{19}$$

$$\langle a_{11}|a_{11}\rangle + \langle a_{10}|a_{10}\rangle = 1 \tag{20}$$

From the symmetry requirement (i) and defining two parameters F and D we have

$$\langle a_{00}|a_{00}\rangle = \langle a_{11}|a_{11}\rangle = F \tag{21}$$

and

$$\langle a_{01}|a_{01}\rangle = \langle a_{10}|a_{10}\rangle = D \tag{22}$$

where $F + D = 1$. From the unitary condition i.e. taking the overlaps of equations (13), (14) we have

$$\langle a_{00}|a_{10}\rangle + \langle a_{01}|a_{11}\rangle = 0 \tag{23}$$

and by imposing symmetry condition (i) equation (23) becomes

$$\langle a_{11}|a_{01}\rangle + \langle a_{10}|a_{00}\rangle = 0 \tag{24}$$

We shall also impose that all overlaps are real numbers i.e. $\langle a_{00}|a_{01}\rangle = \langle a_{01}|a_{00}\rangle$ which you can do by careful choices of the local phase of the states. Now because the overlaps are real

$$\langle a_{00}|a_{10}\rangle = 0$$

$$\langle a_{01}|a_{11}\rangle = 0$$

$$\langle a_{11}|a_{01}\rangle = 0$$

$$\langle a_{10}|a_{00}\rangle = 0 \tag{25}$$

This means all these probe states are orthogonal to one another. We will also define some final parameters F_1 and D_1 that characterize the overlap of the remainder.

$$\langle a_{00}|a_{11}\rangle = \langle a_{11}|a_{00}\rangle = F_1 \tag{26}$$

$$\langle a_{10}|a_{01}\rangle = \langle a_{01}|a_{10}\rangle = D_1 \tag{27}$$

What we are doing is basically defining the unitary transform U that we want to perform on the states. We already know the relation $F + D = 1$, now we need another formula to relate the final variables F_1 and D_1. We can do this from symmetry argument (ii). By transforming the probe states in one basis to their representation in the other basis using equation (17) then we get

$$F - D = F_1 + D_1 \tag{28}$$

We can re-write equations (13) and (14) with the probe states normalized. Normalized probe states from now on will be denoted with a hat i.e. $|\hat{a}\rangle$. The normalized states are

$$|a\rangle \otimes |x\rangle \longrightarrow \sqrt{F}|\hat{a}_{00}^{xy}\rangle \otimes |x\rangle + \sqrt{D}|\hat{a}_{01}^{xy}\rangle \otimes |y\rangle \tag{29}$$

$$|a\rangle \otimes |y\rangle \longrightarrow \sqrt{F}|\hat{a}_{11}^{xy}\rangle \otimes |y\rangle + \sqrt{D}|\hat{a}_{10}^{xy}\rangle \otimes |x\rangle \qquad (30)$$

There are similar relations for the u-v basis as well thanks to the symmetry condition (ii), but because of this symmetry it is sufficient to analyze just one basis and carry the results over to the other basis. F as it appears here is the fidelity. Note from equations (29), (30) that these are entangled states. Looking specifically at equation (29), when Bob makes his measurement in the basis that Alice sent the state in, the only states that will eventually form the sifted key, he can get two outcomes. Either the state was $|x\rangle$ which occurs with probability F in which case the superposition will collapse and Eve's probe state instantaneously jumps to $|\hat{a}_{00}^{xy}\rangle$. This means Eve has got away without causing a disturbance. The other outcome is $|y\rangle$, an error or disturbance in Alice and Bob's sifted key occurring with probability D. Just because Eve got away without causing disturbance a proportion F of the time does not necessarily mean she will conclude correctly what the state Alice sent was. Now Eve has to discriminate between two density matrices because she can store her probes until the basis is publicly announced and choose the best measurement to determine which density matrix it was. Eve's mixed states are

$$\rho_i = tr_{Bob}[U(|a\rangle \otimes |i\rangle\langle a| \otimes \langle i|)U^\dagger] \qquad (31)$$

The density matrices describing Eve's probes after the x-y basis has been announced are

$$\rho_x = F|\hat{a}_{00}\rangle\langle\hat{a}_{00}| + D|\hat{a}_{01}\rangle\langle\hat{a}_{01}| \qquad (32)$$

$$\rho_y = F|\hat{a}_{11}\rangle\langle\hat{a}_{11}| + D|\hat{a}_{10}\rangle\langle\hat{a}_{10}| \qquad (33)$$

From equations (25) we can see the four probe states form two orthogonal sets. One set $\{|\hat{a}_{10}\rangle, |\hat{a}_{01}\rangle\}$ occurs with probability D and the other set $\{|\hat{a}_{00}\rangle, |\hat{a}_{11}\rangle\}$ occurs with probability F. What Eve can do is devise a measurement that unambiguously discriminates these two sets. Because the measurement will also be compatible with the sets it will not change the states of the probes. Eve can also tell, depending on the result of this first measurement, whether she has caused a disturbance to Alice and Bob's key. The second problem is now to discriminate between two, generally nonorthogonal states in the same set. The basis that gives Eve the best chance of guessing the state correctly is the intermediate or Breidbart basis. For two states $|\psi_1\rangle$ and $|\psi_2\rangle$ the probability of guessing the state correctly is [11]

$$P_c = \frac{1}{2} + \frac{1}{2}\sqrt{1 - |\langle\psi_1|\psi_2\rangle|^2} \qquad (34)$$

We know the overlaps between the two sets from equations (21), (22), (26) and (27). These are

$$\langle\hat{a}_{00}|\hat{a}_{11}\rangle = \langle\hat{a}_{11}|\hat{a}_{00}\rangle = \frac{F_1}{F} \qquad (35)$$

$$\langle\hat{a}_{01}|\hat{a}_{10}\rangle = \langle\hat{a}_{10}|\hat{a}_{01}\rangle = \frac{D_1}{D} \qquad (36)$$

So the probability of Eve guessing the correct state is

$$P_c = FP_c^F + DP_c^D \qquad (37)$$

Where $P_c^F = 1/2 + 1/2\sqrt{1-(F_1/F)^2}$ for example. It actually turns out that equation (37) is maximized when the probes in both sets have the same overlap i.e.

$$\frac{F_1}{F} = \frac{D_1}{D} \qquad (38)$$

So $P_c^F = P_c^D$ and because $F + D = 1$ we have the optimum incoherent eavesdropping strategy. Eve has the probability to guess correctly

$$P_c = \frac{1}{2} + \frac{1}{2}\sqrt{1 - (\frac{D_1}{D})^2} \qquad (39)$$

Using the relations $F + D = 1$, $F - D = F_1 + D_1$ and equation (38) we can express P_c in terms of D only giving

$$P_c = \frac{1}{2} + \sqrt{D(1-D)} \qquad (40)$$

This strategy does much better than the intercept-resend strategy at the cost of added technological complexity. Griffiths and Niu [12] have proposed the quantum circuit that does the job. This strategy can also produce deterministic information on every state Alice sends to Bob at the price of completely randomizing their sifted key. This is a good example of the information-disturbance trade off. Eve has a better chance of distinguishing her probe states the smaller she makes their overlap until they become orthogonal to one another and can be discriminated perfectly. The price for decreasing the overlap between Eve's probes is that Bob's density matrices become more uniformly mixed between the wanted and the unwanted states i.e. D increases. This comes from nature's enforcement of unitary evolution, that all the overlaps must remain the same before and after the evolution.

We know this is the optimum strategy from the derivation given by Fuchs *et al.* [9]. The other interesting thing about this strategy is that can be regarded as an asymmetrical cloning machine, taking Alice's state and producing two copies of unequal fidelity. One good copy is passed on to Bob and one bad copy that is kept by Eve. There are bounds on copying machines and the result in equation (40) can be found from work by Cerf *et al.* [13]. However in the derivation presented above the probe lives in a 4 dimensional Hilbert space, in other words the probe consists of two qubits. Using a cloning machine the probe need only be of 2 dimensions, a single qubit. This has been shown by Niu and Griffiths [14].

C. What can Alice and Bob do?

What can Alice and Bob do about this situation if they know about both of these strategies? The condition is that Alice and Bob can recover a secret key by one way privacy amplification if Eve's mutual information on Alice or Bob's bit string is less than the mutual information Alice and Bob share [5, 6]. Formally this constraint is $I(A;B) \geq max\{I(E;B), I(A;E)\}$, where $I(A;B)$ is the mutual information between Alice and Bob, $I(A;E)$ is the mutual information between Alice and Eve and $I(E;B)$ is the mutual information Eve and Bob share. We use the one way result for simplicity.

The average mutual information Alice and Bob share on the sifted key after public announcement of the basis in the presence of an eavesdropper is just the average mutual information on a binary symmetric channel [15]. The disturbance, D, an eavesdropper introduces looks like a data flipping rate to Alice and Bob.

$$I(A;B) = \log 2 + D \log D + (1-D)\log(1-D) \quad (41)$$

$I(A;B)$ can be expressed in bits by taking the logarithms to the base 2 or nats by taking logarithms to the base e. Equation (41) can be expressed more symmetrically in terms of a function $\phi(z)$ [9] as

$$I(A;B) = \frac{1}{2}\phi(1-2D) \quad (42)$$

Where $\phi(z)$ is

$$\phi(z) = (1-z)\log(1-z) + (1+z)\log(1+z) \quad (43)$$

The average mutual information Alice and Eve, $I(A;E)$, and Eve and Bob share, $I(E;B)$, are equal for these strategies. The probability of the bit being flipped in this case is just $1-P_c$. Expressed in terms of the function $\phi(z)$ this is

$$I(A;E) = I(E;B) = \frac{1}{2}\phi[1-2(1-P_c)] \quad (44)$$

By comparing equation (42) with equation (44) we can find the maximum disturbance at which Alice and Bob can expect to obtain a secret key by privacy amplification i.e. $I(A;B) > I(A;E)$. For a secret key to be obtained by *one way* privacy amplification

$$D < 1 - P_c \quad (45)$$

For the intercept-resend strategy this is

$$D < \frac{1}{2(1+\sqrt{2})} \quad (46)$$

for secret key generation to be possible and for the optimal incoherent strategy

$$D < \frac{2-\sqrt{2}}{4} \quad (47)$$

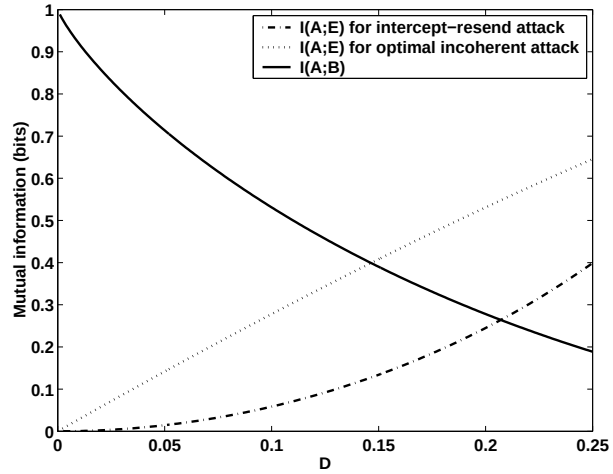

FIG. 2: The average mutual information as a function of the error rate, D, for each strategy. The point at which $I(A;B)$ crosses with $I(A;E)$ is the point at which Alice and Bob can no longer distill a secret key by one way privacy amplification.

This means if the channel has a noise level greater than this value then Alice and Bob cannot use it for quantum key generation as they should assume all disturbance to derive from an eavesdropper [9] if they are using one way privacy amplification. If they detect disturbance above this level then they must try the whole key generation process again or give up. However, in a practical implementation of quantum cryptography this may be over-conservative [17]. The average mutual information between Alice and Eve and Alice and Bob in bits for both strategies is shown in figure 2.

III. INCOHERENT EAVESDROPPING: LASER PULSES

In this section we use the results from section II to form better strategies when the light source is a laser pulse that can be modelled by a mixture of number states with a Poissonian photon number distribution. All of these attacks use a beam-splitter apart from the photon-number splitting attack. In the photon-number splitting attack an eavesdropper can make a decision on what her best action should be because she can measure the number of photons in the pulse non-destructively. We start by introducing a few tools needed for this next part.

A. The beam-splitter

A beam-splitter either reflects a photon with some probability r or it transmits it with probability t. We are going to be dealing with lossless beam-splitters so $r + t = 1$. The beam-splitter is shown in figure 3. We can describe the action of the beam-splitter on a number state $|n\rangle$ entering through channel a and the vacuum

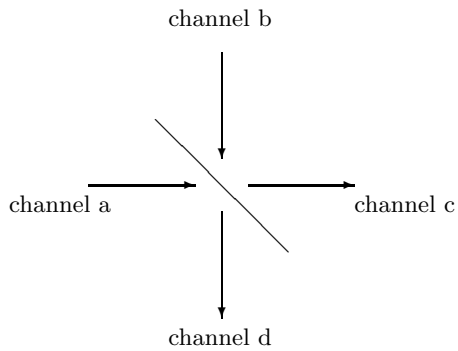

FIG. 3: A beam-splitter: Photons going into channel c have been transmitted with probability t, photons going into channel d have been reflected with probability r if all photons arrive from channel a.

state $|0\rangle$, entering through channel b as

$$|n\rangle_a \otimes |0\rangle_b \longrightarrow \sum_{i=0}^{n} c_i |i\rangle_c \otimes |n-i\rangle_d \tag{48}$$

The c_i's are the probability weighting for each situation. If we take the reflection or transmission of a photon as being independent of each other than the c_i are given by the binomial formula normalized appropriately

$$c_i = [\binom{n}{i} t^i r^{n-i}]^{\frac{1}{2}} \tag{49}$$

Where

$$\binom{n}{i} = \frac{n!}{i!(n-i)!}$$

So the probability of detecting j photons in channel c is

$$|(\langle j|_c \otimes \langle n-j|_d)(\sum_{i=0}^{n} c_i |i\rangle_c \otimes |n-i\rangle_d)|^2$$

$$= \frac{n!}{j!(n-j)!} t^j (1-t)^{n-j} \tag{50}$$

B. Representation of laser pulses

In the ideal situation one would what to use a light source that emits single photons on demand. Unfortunately sources that emit single photon number states are not available yet. Practical quantum cryptography usually uses an attenuated laser pulse. These pulses can be modelled as a mixed state with a Poisson number state distribution or as a superposition of number states with a Poisson distribution, a coherent state. In the following analysis we calculate values using a coherent state as the input although strictly speaking the input state is mixed when the logical bit values are encoded onto the polarisation. However, whichever input state is used gives the same answers for the values we are interested in, those given in section III C and onwards. The probability of detecting n photons in a pulse with mean photon number μ is given by

$$p_n = e^{-\mu} \frac{\mu^n}{n!} \tag{51}$$

If Alice and Bob's quantum channel, the channel they use for sending the states that make up the key is lossy, the probability of detecting n photons when the pulse gets to Bob is

$$p_n = e^{-\eta\mu} \frac{(\eta\mu)^n}{n!} \tag{52}$$

Where η is the transmission efficiency of the channel, the probability that each photon has of being detected by Bob. When $\eta = 1$ the channel has no loss, all photons in the pulse make it to Bob. When $\eta = 0$ the channel is completely opaque.

The operation of the beam-splitter on a light pulse entering from channel a (figure 3) looks like

$$\sum_{n=0}^{\infty} \sqrt{p_n} |n\rangle_a \otimes |0\rangle_b \longrightarrow \sum_{n=0}^{\infty} \sqrt{p_n} \sum_{i=0}^{n} c_i |i\rangle_c \otimes |n-i\rangle_d \tag{53}$$

The probability to find j photons in channel c is

$$|(\sum_{m=0}^{\infty} \langle j|_c \otimes \langle m-j|_d)(\sum_{n=0}^{\infty} \sqrt{p_n} \sum_{i=0}^{n} c_i |i\rangle_c \otimes |n-i\rangle_d)|^2 \tag{54}$$

C. Eavesdropping attacks using a beam-splitter

We can know formulate an incoherent attack based on beam-splitting. In a practical implementation, a laser produces states that give the chance that multiple photons will be detected, a good scenario for an eavesdropper trying to evade detection. All current quantum cryptographic systems use these sources and this will be the case until reliable, efficient, single photon sources become available. Work has also been done on these attacks by [16, 17].

The eavesdropper has positioned her beam-splitter in Alice and Bob's quantum channel and replaced their lossy quantum channel with a lossless one ($\eta = 1$). The beam-splitter is characterized by its transmission coefficient, t, and its reflection coefficient $r = 1 - t$. These are just the probabilities that a photon incident on the beam-splitter is transmitted or reflected respectively. Alice sends polarisation encoded Poissonian distribution mixed photon

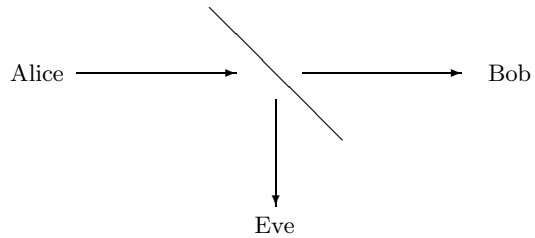

FIG. 4: Beam-splitter attack scenario A. The arrows in Alice's, Bob's and Eve's channels represent the detection of at least one photon. The eavesdropper profits most from this situation.

number states to Bob. These are characterized by their mean photon number μ. We have four scenarios that can happen during Eve's attack labelled A, B, C and D. These scenarios will be quoted when formulating specific attacks later.

1. *Scenario A (figure 4)*

Alice has emitted a state with more than one photon in it. *At least* one of these photons is reflected at the beam-splitter and travels into Eve's channel *and at least* one photon is transmitted by the beam-splitter into Bob's channel. This means Eve can obtain this state for free. She can store the photon provided she has the technology, until Alice and Bob announce the basis publicly and then discover the photon's state unambiguously. In these circumstances Eve does not cause an error on the sifted key.

Scenario A is the ideal outcome for Eve, she cannot be detected and she gets deterministic information provided she can store and preserve the photon or probe's state until public announcement of the basis. For this scenario to occur there needs to be at least two photons and at least one in each channel. To find the probability for scenario A to occur this means we have to alter the summation limits for the beam-splitter operation on the pulse to give

$$P_A = \sum_{n=2}^{\infty} p_n \sum_{i=1}^{n-1} |c_i|^2 \tag{55}$$

We can replace the beam-splitter part, the last summation on the right by reordering i.e.

$$\sum_{i=1}^{n-1} |c_i|^2 = 1 - |c_0|^2 - |c_n|^2 = 1 - r^n - t^n \tag{56}$$

Putting in the explicit form of p_n and making use of $r = 1 - t$ we have

$$P_A = e^{-\mu} \sum_{n=2}^{\infty} \frac{\mu^n}{n!}[1 - (1-t)^n - t^n] \tag{57}$$

The remaining summation can also be dealt with using the same trick

$$\sum_{n=0}^{\infty} \frac{x^n}{n!} = 1 + x + \frac{x^2}{2!} + ... + \frac{x^n}{n!} = e^x \tag{58}$$

So with the limits in equation (57)

$$\sum_{n=2}^{\infty} \frac{x^n}{n!} = e^x - x - 1 \tag{59}$$

After some algebra P_A is

$$P_A = 1 + e^{-\mu} - e^{-\mu t} - e^{-\mu(1-t)}$$

$$= 1 + e^{-\mu} - 2e^{-\frac{\mu}{2}} \cosh[\mu(t - 1/2)] \tag{60}$$

P_A is maximized when $t = 1/2$ (i.e. $\cosh(x)$ reaches a minimum when $x = 0$) but maximizing this probability means changing the probabilities for the other scenarios which may not be the best thing to do as Eve is trying to make her presence as inconspicuous as possible.

2. *Scenario B (figure 5)*

Alice has emitted a state with one or more photons in it. However all the photons in the state are reflected into Eve's channel. This is a bad situation for Eve. There is no chance that this state will form part of Alice and Bob's sifted key and the second part of the bad news is that Eve is lowering the proportion of the time Bob is expecting to receive a click at his detectors. Bob expects a certain proportion of the time not to receive a photon because sometimes the pulse sent by Alice is the vacuum state and Alice and Bob's original channel has a transmission efficiency. He will know what proportion this should be by calculating it from the settings of Alice's equipment; what she has set the mean photon number, μ, of the pulses to be by running the light through an attenuator and by making measurements of the channel transmission efficiency, η. This scenario reduces the proportion of states sent that have at least one photon in them from Bob's point of view.

The probability for this occurrence is

$$P_B = \sum_{n=1}^{\infty} p_n |c_0|^2 = e^{-\mu} \sum_{n=1}^{\infty} \frac{\mu^n}{n!}(1-t)^n \tag{61}$$

Again rearranging the summation we have

$$P_B = e^{-\mu t} - e^{-\mu} \tag{62}$$

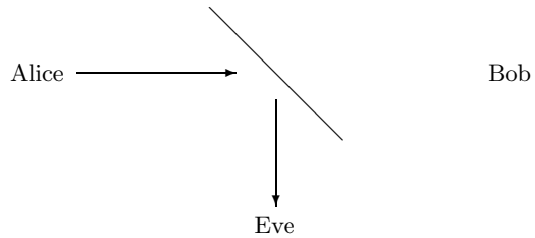

FIG. 5: Beam-splitter attack scenario B. The arrows in Alice's and Eve's channels represent the detection of at least one photon. Note the absence of a photon in Bob's channel.

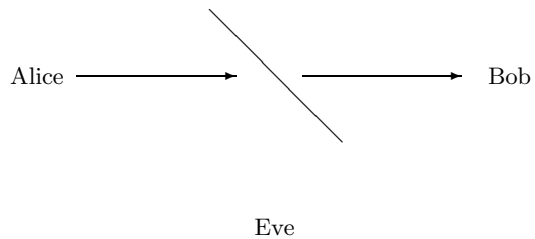

FIG. 6: Beam-splitter attack scenario C. The arrows in Alice's and Bob's channels represent the presence of at least one photon.

3. *Scenario C (figure 6)*

In this scenario all photons in the pulse are transmitted by the beam-splitter into Bob's channel. This is not as bad a situation as scenario B but it is not as good as scenario A. The states in this scenario may go on to form part of Alice and Bob's sifted key and Eve does not cause any additional reduction in the proportion of non-empty pulses reaching Bob. Just because Eve does not receive a photon in her channel does not mean she need be completely ignorant of its identity. Eve could employ one of the single photon strategies in section II at the cost of introducing errors on Alice and Bob's sifted key. The probability that scenario C occurs (all photons end up in Bob's channel) is

$$P_c = \sum_{n=1}^{\infty} p_n |c_n|^2 = e^{-\mu} \sum_{n=1}^{\infty} \frac{\mu^n}{n!} t^n \tag{63}$$

Which becomes

$$P_c = e^{-\mu(1-t)} - e^{-\mu} \tag{64}$$

4. *Scenario D*

This is a simple occurrence. This is just the situation that the pulse Alice emits has no photon in it. It is the vacuum state. In this case neither Alice, Bob or Eve can get any information. The probability of zero photons in the state is

$$P_0 = e^{-\mu} \tag{65}$$

5. *Photon number distribution after the beam-splitter*

When Eve inserts a beam-splitter into Alice and Bob's quantum channel she alters the probability of the number of photons Bob detects. The probability that Bob finds i photons in his channel was given by equation (54). Written explicitly this is

$$P(i) = e^{-\mu} \frac{(\mu t)^i}{i!} \sum_{n=i}^{\infty} \frac{[\mu(1-t)]^{n-i}}{(n-i)!}$$

$$= e^{-\mu t} \frac{(\mu t)^i}{i!} \tag{66}$$

On comparison with equation (52) we can see that the addition of the beam-splitter does not change the overall shape of the photon number distribution; it is still Poissonian (although with a smaller average number of photons). If Eve then replaces Alice and Bob's lossy channel described by η with one that is lossless ($\eta = 1$) she can then choose the transmission coefficient of the beam-splitter, t to match η ($\eta = t$). In this way Eve does not cause any change the photon statistics Bob expects.

D. Intercept-resend attack with a beam-splitter

A strategy like this could be implemented with today's technology. This section borrows the main results from section II A and section III C.

This is what Eve does: If she gets photons in her channel she measures them in every instance that the situation occurs. When scenario A occurs, only the photons in Bob's channel will be subject to error checking so she will not cause any errors on the sifted key. Borrowing the main result from section II A Eve's probability of guessing the state correctly from scenario A alone is

$$P^{i-r}(D = \frac{1}{4}) = \frac{\sqrt{2}+2}{4} \tag{67}$$

The overall probability that Eve guesses the correct state when scenario A occurs is

$$P_A^{correct} = \frac{P_A P^{i-r}(D = 1/4)}{1 - P_0 - P_B} \tag{68}$$

The denominator in the equation above appears because we only include those situations in which the states have the opportunity to form part of Alice and Bob's sifted key. It is like a normalizing factor. Eve may get more than one photon in her channel when scenario A occurs. If she then measures them in the intermediate basis she may get both measurement results M_0 and M_1. What should Eve conclude now? We make an approximation here and say that Eve always gets a single result. To give some justification of this if Eve has a detector that can measure the number of photons incident on it but destroys the photons in the process then when Eve analyzes more than one photon she can be reasonably certain that the bit value sent was the one that resulted in the higher number of photon detections for a that outcome. The only time Eve must make a 50/50 guess is when there are the same number of detected photon for each measurement outcome. However, more than one photon detected for only one outcome will give Eve a higher probability of guessing the state correctly so we think this is not a bad approximation.

The second part of the strategy is that when Eve does not get a photon in her channel she measures a proportion, ϵ, of the photons that make it into Bob's channel. She only does this a proportion of the time to control the level of disturbance she inflicts on Alice and Bob's sifted key. The disturbance, D_{AB}, that Alice and Bob see in their sifted key is going to be different from the D appearing in the single photon strategies because they only see this disturbance on a proportion of the bits, those that came from scenario C namely

$$\frac{\epsilon P_c}{1 - P_0 - P_B} \tag{69}$$

Therefore the disturbance Alice and Bob see is

$$D_{AB}(\epsilon) = \frac{D(\epsilon)P_C}{1 - P_0 - P_B} \tag{70}$$

The probability of guessing the state correctly from scenario C is given by

$$P_C^{correct}(D) = \frac{P^{i-r}(D)P_C}{1 - P_0 - P_B} \tag{71}$$

Where (borrowed from section II A)

$$P^{i-r}(D) = \sqrt{2}D + \frac{1}{2} \tag{72}$$

So the total probability of guessing the state correctly is

$$P_{tot}^{correct} = \frac{P_A P^{i-r}(D = 1/4) + P_C P^{i-r}(D)}{1 - P_0 - P_B} \tag{73}$$

The probabilities of each of the scenarios is dependant on the transmission coefficient of the beam-splitter, t. From section III C it was found that if Alice and Bob are expecting to see a line with loss η then Eve can replace it with a lossless one and make her beam-splitter transmission be $t = \eta$ to give the same photon number statistics Bob expects. Now what Eve has to do to avoid Alice and Bob's suspicions is fix the value of t to the value of η as well as lowering the error rate Alice and Bob see, D_{AB}.

Giving the explicit form of equation 73 we have

$$P_{tot}^{correct} = \frac{\sqrt{2} + 2}{4} - e^{-\mu(1-t)}[\sqrt{2}(1/4 - D)] \tag{74}$$

The disturbance Alice and Bob see (the error rate in their sifted keys) is

$$D_{AB} = De^{-\mu(1-t)} \tag{75}$$

With equation (75) Eve can control the error rate and by knowing η she can then calculate how likely she is to guess the correct values of the bits using equation (74).

E. Optimal incoherent attack with a beam-splitter

This attack is similar to the last one considered except now the eavesdropper has better technology and can use the strategy reported in section II B and extract more information for a fixed disturbance. When scenario A occurs this time, Eve can perform an interaction between the probe and the photon in her channel to maximize the disturbance to the photon's state and maximize the distinguishability of the probe. She can then store the probe and wait until the basis is announced before measuring it. Now she can unambiguously determine which state Alice sent to Bob. When scenario C occurs the eavesdropper reverts to the single photon strategy and again Alice and Bob will notice a smaller average disturbance D_{AB} then D because this situation does not occur all the time. Eve again should set $\eta = t$ to give Bob the same photon statistics and D_{AB} will be given by equation (75).

So scenario A occurs. The eavesdropper has a probability of being correct from this circumstance that is

$$P_A^{correct} = \frac{P_A}{1 - P_0 - P_B} \tag{76}$$

There is no additional multiplier because Eve gains deterministic information i.e. $P^{opt}(D = 0.5) = 1$.

Scenario C occurs giving a probability of being correct

$$P_C^{correct} = \frac{P_C P^{opt}(D)}{1 - P_0 - P_B} \tag{77}$$

$P^{opt}(D)$ is the probability of guessing the state correctly taken from section II B and is as a reminder

$$P^{opt}(D) = \frac{1}{2} + \sqrt{D(1 - D)} \tag{78}$$

The total probability that Eve guesses the correct state is

$$P_{tot}^{correct} = \frac{P_A + P_C P^{opt}(D)}{1 - P_0 - P_B} \tag{79}$$

The total probability of Eve guessing the state correctly given explicitly is

$$P_{tot}^{correct} = 1 - e^{-\mu(1-t)}[1/2 - \sqrt{D(1-D)}] \tag{80}$$

F. Photon-number splitting attack

What an eavesdropper can do here is perform unlimited numbers of quantum non-demolition (QND) measurements with unit efficiency. QND measurements are measurements that give the value of one observable without effecting the other degrees of freedom. The QND measurement Eve is interested in is one which tells her the number of photons in the laser pulse without effecting their polarisation. These measurements are very difficult to perform, the first demonstration being by Nogues *et al.* [18]. This eavesdropping attack is far beyond present technology. Work on these kinds of attack has also been done by [19, 20]. The flip side is that if Alice has the technology to perform QND measurements then she can simply stop any pulse that has more than one photon in it before sending it to Bob. In this case an eavesdropper will have revert to the strategies given in section II. We will here analyze the case of the more advanced eavesdropper.

Using this attack Eve can discover the number of photons in the pulse and then choose her actions accordingly. If there is more than one photon in the pulse she just splits off a single photon and lets the others pass to Bob. She can then perform an interaction with her probe and store it until the basis is announced then make a measurement that will give her the correct value every time. If there is more than one photon in the pulse then Eve does not cause an error on Alice and Bob's sifted key. If she sees only one photon then she performs the optimal incoherent attack at the cost of adding some disturbance. If Alice and Bob have a lossy channel with some transmission efficiency η, Eve can replace this channel with a lossless one then selectively block the single photon pulses to give the same proportion of non-empty pulses Bob is expecting. In this way Eve may even be able to obtain deterministic knowledge of Alice and Bob's sifted key without causing *any* errors depending on the values of the original channel transmission efficiency η and the mean photon number μ.

From equation (51) the probability that Alice sends a pulse containing zero and one photons are

$$P_0 = e^{-\mu} \tag{81}$$

$$P_1 = \mu e^{-\mu} \tag{82}$$

And the probability for detecting more than one photon is

$$P_{n>1} = 1 - e^{-\mu}(1+\mu) \tag{83}$$

If Eve blocks a proportion κ of the pulses containing one photon then her probability of guessing the state correctly is

$$P_{tot}^{correct}(D) = \frac{P_{n>1} + (1-\kappa)P_1 P^{opt}(D)}{1 - P_0 - \kappa P_1} \tag{84}$$

The denominator is again there to exclude the circumstances that Alice and Bob (and Eve in this case) do not use, all the empty pulses. The probability of Eve guessing the state correctly is given explicitly as

$$P_{tot}^{correct}(D) = \frac{1 - e^{-\mu}(1+\mu) + (1-\kappa)\mu e^{-\mu}[1/2 + \sqrt{D(1-D)}]}{1 - e^{-\mu}(1+\mu\kappa)} \tag{85}$$

The disturbance Alice and Bob see when Eve uses this strategy is

$$D_{AB} = \frac{(1-\kappa)P_1}{1 - P_0 - \kappa P_1} D$$

$$= \frac{(1-\kappa)\mu e^{-\mu}}{1 - e^{-\mu}(1+\mu\kappa)} D \tag{86}$$

If Alice and Bob's quantum channel has transmission efficiency η, Eve can block a proportion, κ, of the one photon pulses if she replaces Alice and Bob's channel with a lossless one ($\eta = 1$). We can equate the number of non-empty pulses Bob expects to see with a lossy channel to the number of non-empty pulses after Eve selectively blocks the single photon pulses.

$$1 - e^{-\eta\mu} = (1-\kappa)P_1 + P_{n>1} \tag{87}$$

This gives κ as

$$\kappa = \frac{1}{\mu}[e^{\mu(1-\eta)} - 1] \tag{88}$$

When $\kappa = 1$ Eve has deterministic knowledge of the *whole* of Alice and Bob's key without causing *any* errors in it. Lossy lines and high mean photon numbers are therefore a huge security risk under this attack. The value of η as a function of the mean photon number, μ,

this occurs at is given by

$$\eta = 1 - \frac{1}{\mu}\ln(1+\mu) \tag{89}$$

G. What can Alice and Bob do?

If Alice and Bob are trying quantum key distribution with attenuated laser pulses instead of a single photon source what measures can they take to ensure that Eve does not obtain their key? The first thing Alice and Bob can do is check the error rate in their keys. Using the same criteria as in section II C for one way privacy amplification to be successful then

$$D_{AB} < 1 - P_{tot}^{correct}$$

If Eve is using the intercept-resend strategy presented here Alice and Bob must detect a lower disturbance than

$$D_{AB} < \frac{2-\sqrt{2}(1-e^{-\mu(1-\eta)})}{4(1+\sqrt{2})} \tag{90}$$

to be able to distill a secret key. If Eve is using the optimal incoherent attack then

$$D_{AB} < (\frac{2-\sqrt{2}}{4})e^{-\mu(1-\eta)} \tag{91}$$

And finally if Eve is using the photon-number splitting attack then

$$D_{AB} < (\frac{2-\sqrt{2}}{4})[\frac{(1+\mu)e^{-\mu} - e^{-\eta\mu}}{1-e^{-\eta\mu}}] \tag{92}$$

The average mutual information as a function of D_{AB}, the error rate in Alice and Bob's sifted key is plotted for each of these strategies in figure 7 for $\eta = 0.9$ and $\mu = 1$.

Apart from measuring the disturbance or error rate in their keys, Alice and Bob can also monitor coincidence counts [17]. Bob can count the number of times both of his detectors click when he chooses the wrong basis i.e. he gets both results from his measurement. These occurrences come from multiple photons in the laser pulse. Bob knows the mean photon number of the pulses Alice is sending and the transmission efficiency of their channel so he can work out how often this should occur. This is what he can do to monitor the photon number distribution if he does not have a detector that can discriminate the number of photons incident on his detector. Bob expects

$$P_{coincidence} = \frac{1}{2}e^{-\eta\mu}\sum_{n=2}^{\infty}\frac{(\eta\mu)^n}{n!}\sum_{i=1}^{n-1}\binom{n}{i}2^{-n} \tag{93}$$

$$P_{coincidence} = \frac{1}{2}(1+e^{-\eta\mu} - 2e^{-\frac{\eta\mu}{2}}) \tag{94}$$

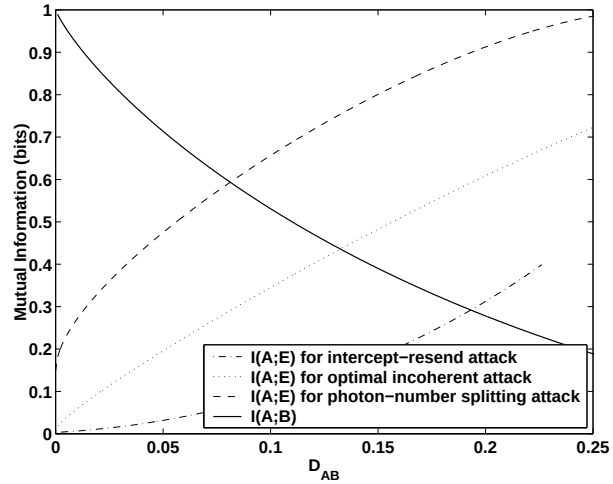

FIG. 7: The average mutual information as a function of the error rate, D_{AB}, for each strategy at a fixed $\eta = 0.9$ and $\mu = 1$. The point at which $I(A;B)$ crosses with $I(A;E)$ is the point at which Alice and Bob can no longer distill a secret key by one way privacy amplification.

The 2^{-n} term on the right hand side of equation (93) is because when Bob uses the wrong basis he effectively has a 50/50 beam-splitter and the 1/2 factor comes from the fact that Bob chooses the wrong basis half the time. Eve will not effect the photon number distribution that Bob sees in the beam-splitting attacks providing she has set the beam-splitter transmission to equal the transmission efficiency, η, of their original lossy quantum channel as shown in section III C. The photon number distribution is still Poissonian. However, with the more powerful QND attack which is dependant on the number of photons in the pulse the photon number statistics Bob sees will no longer be Poissonian. In the strategy above we fixed the number of non-empty pulses to be equivalent to Bob's expectations. In doing this though we have reduced the probability of Bob finding a pulse containing more than one photon which Bob can detect from the reduction in the proportion of coincidence counts. A more detailed analysis of this is given by Félix *et al.* [17] and Lütkenhaus and Jahma [21].

IV. CONCLUSION

We have given a simple derivation of beam-splitting and photon-number splitting attacks on the BB84 protocol in a realistic implementation: that of using a laser pulse to send signals instead of the ideal single photon source and of using a channel that is lossy. From these results we found a bound on the maximum disturbance or error rate Alice and Bob can accept in their sifted keys to successfully complete privacy amplification and give Eve an insignificant amount of knowledge of the key once this process is complete. These results make no approximation of small mean photon number.

There is now a large amount of research on eavesdropping on quantum cryptography. These works have largely neglected analyzing the EPR based protocols, the first given by Ekert in 1991 [22]. We think it would be interesting to look at eavesdropping strategies on realistic implementations of these protocols.

Acknowledgments

We would like to thank EPSRC, the European Commission, Elsag SpA and Hewlett-Packard.

[1] Gisin, N., Ribordy, G., Tittel, W., and Zbinden, H., 2002, *Rev. Mod. Phys.* **74**, 145.
[2] Bennett, C. H., Brassard, G., and Ekert, A. K., 1992 *Sci. Am.* **267**, 50.
[3] Bennett, C. H., and Brassard, G., 1984, *Proceedings of IEEE International Conference on Computers, Systems and Signal Processing*, Bangalore, India, 10-12 December, pp. 175-179.
[4] Bennett, C. H., Brassard, G., Crépeau, C., and Maurer, U. M., 1995, *IEEE Trans. Info. Theory* **41**, 1915.
[5] Ekert, A., Huttner, B., Palma, G. M., and Peres, A., 1994, *Phys. Rev. A* **50**, 1047.
[6] Csiszár, I., and Körner, J., 1978, *IEEE Trans. Info. Theory* **24**, 339.
[7] Huttner, B., and Ekert, A. K., 1994, *J. Mod. Opt.* **41**, 2455.
[8] Bechmann-Pasquinucci, H., and Gisin, N., 2002, Report No. quant-ph/0208031.
[9] Fuchs, C. A., Gisin, N., Griffiths, R. B., Niu, C-S, and Peres, A., 1997, *Phys. Rev. A* **56**, 1163.
[10] Cirac, J. I., and Gisin, N., 1997, *Phys. Lett. A* **229**, 1.
[11] Helstrom, C. W., 1976, *Quantum Detection and Estimation Theory.* (Academic, New York).
[12] Griffiths, R. B., and Niu, C-S, 1997, *Phys. Rev. A* **56**, 1173.
[13] Cerf, N. J., Bourennane, M., Karlsson, A., and Gisin., N., 2002, *Phys. Rev. Lett.* **88**, 127902.
[14] Niu, C-S, and Griffiths, R. B., 1999, *Phys. Rev. A* **60**, 2764.
[15] Cover, T. M., and Thomas, J. A., 1991, *Elements of Information Theory.* (John Wiley and sons, New York).
[16] Dušek, M., Haderka, O., and Hendrych, M., 1999, *Optics Comms.* **169**, 103.
[17] Félix, S., Gisin, N., Stefanov, A., and Zbinden H., 2001, *J. Mod. Opt.* **48**, 2009.
[18] Nogues, G., Rauschenbeutel, A., Osnaghi, S., Brune, M., Raimond, J. M., and Haroche, S., 1999, *Nature* **400**, 239.
[19] Lütkenhaus, N., 2000, *Phys. Rev. A* **61**, 052304.
[20] Brassard, G., Lütkenhaus, N., Mor, T., and Sanders, B., 2000, *Phys. Rev. Lett.* **85**, 1330.
[21] Lütkenhaus, N., and Jahma, M., 2002, *New J. Phys.* **4**, art. no. 44.
[22] Ekert, A. K., 1991, *Phys. Rev. Lett.* **67**, 661.